



U.S. GLOBAL RESOURCES
75 YEARS OF BUSINESS TO A GROWING WORLD




P.L. LIGHT SYSTEMS
THE LIGHTING KNOWLEDGE COMPANY

HSE

NXT-LP

600W / 1000 WATT FIXTURE

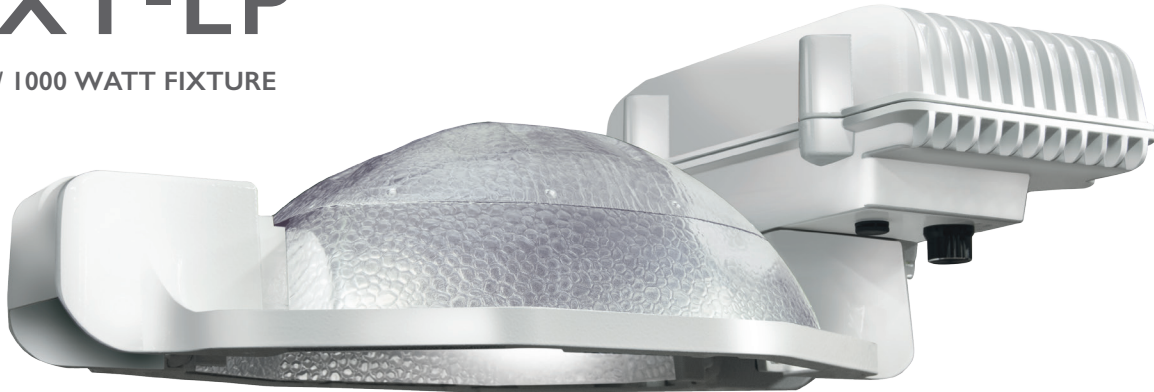

UNCOMPROMISING LIGHTING PERFORMANCE.

Engineered specifically for low ceiling applications, the HSE NXT-LP offers growers the same industry-leading performance they have come to expect from the NXT family of products — without compromise.

The fixture's ultra low-profile design lends itself ideally to close-to-ceiling mounting, to allow for more space between the fixture and the surface of the crop in facilities where ceiling height is limited.


KEY FEATURES & BENEFITS INCLUDE:

- Delivers optimum light output, unparalleled uniformity and depth penetration.
- Low-profile cast-aluminum housing for close-to-ceiling mounting — allowing for more space between light fixture and the surface of the crop.
- Dimmable electronic ballast.
- Built in heat fins and “breathable membrane” to reduce operating temperature.
- Die-cast ballast compartment for easy access.
- Single part casting with slide lock sockets to make lamping and re-lamping quick and easy.



CALL 1-888-334-1440 OR 206-722-3999 TODAY AND ASK FOR A DETAILED LIGHT PLAN!

EXCEPTIONAL DEPTH PENETRATION

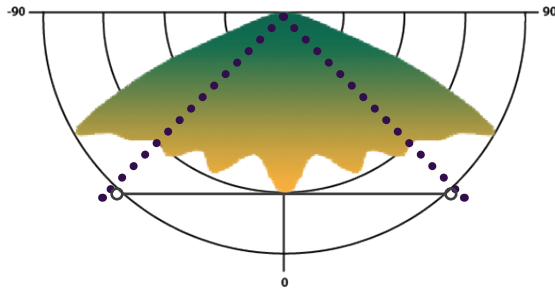



With taller plants, directing light deep within the canopy — to reach the lower leaves — is typically a challenge. For this reason, growers should be looking at both the **light output** and **light distribution** when selecting the best supplemental lighting for their application.

High peak candela values between 0 & 45 degrees in the lower hemisphere of the distribution curve indicate good depth penetration into the crop beneath the fixture.

The NXT-LP with Beta reflector, displays high values across this entire section of the curve to deliver uniformly deep light penetration into the canopy.

DIMENSIONS

	Alpha/Beta	Asymmetric
x = length	21.25 in. (53.98 cm)	22.75 in. (57.79 cm)
y = width	11.00 in. (27.94 cm)	14.00 in. (35.56 cm)
z = height	7.50 in. (19.05 cm)	9.00 in. (22.86 cm)
weight	10.00 lb. (4.54 kg)	10.30 lb (4.67 kg)

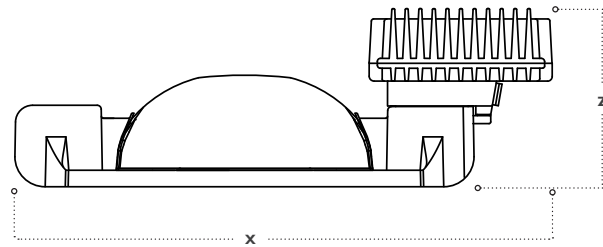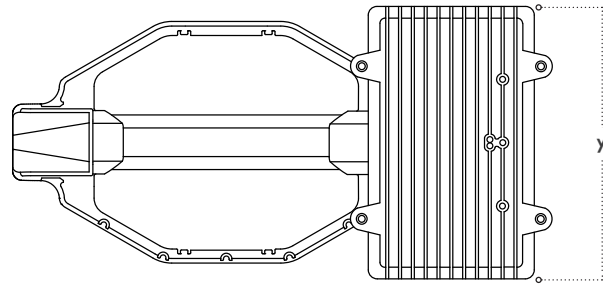

TECHNICAL SPECIFICATIONS*

	600W			1000W			
RATED MAIN VOLTAGE	120V	208V	240V	208V	240V	277V	347V
INPUT CURRENT	5.50A	3.04A	2.65A	5.10A	4.42A	3.77A	3.00A
POWER FACTOR	>0.98			>0.98			
INPUT FREQUENCY	50/60Hz			50/60Hz			
ACTUAL INPUT POWER	660W	632W	632W	1060W	1060W	1045W	1040W
LAMP TYPE	HPS 600W 400V ELECTRONIC			HPS 1000W 400V ELECTRONIC			

* Accurate to $\pm 10\%$

U.S. GLOBAL RESOURCES

DISTRIBUTING PL LIGHTS SINCE 1983 - 34 YEARS



P.L. LIGHT SYSTEMS

SEATTLE . FLORIDA . TEXAS

T: 206.722.3999 Toll Free: 1.888.334.1440 F: 206.721.1140 E: usgr@usgr.com www.usgr.com