

Destructor Junior S/C

\$9,300

Incinerator for Poultry, Swine, Animal and Waste Disposal

The Destructor Junior Incinerator with secondary chamber is the small incinerator designed with the Poultry Grower in mind!

Space and Volume Efficient

Designed for poultry operations, Destructor Junior S/C requires only a 5' x 5' area for operation to handle 80 to 100 pounds per hour. A weatherproof electrical control box means Destructor Junior S/C can be installed indoors or out.

Energy Efficient

Destructor Junior S/C has two re-adjustable gas burners with two 60-minute timers. Natural or propane fuel may be used. In testing, it is estimated that it uses 2 to 2-1/2 gallons of propane per hour.

Test Data

U.S. environmental tests are available upon request. Continued research in new design, laboratory and field tests, and performance evaluations are constantly at work to improve the operating efficiency of their equipment. 15 years of refinements has made us the leader in Agricultural Incinerators.



Features

- 100 Lb capacity
- Natural or Propane Fuel
- Two re-adjustable gas burner
- 60-minute intermatic timer
- 115 Volt
- Only requires 5' x 5' space
- Inside or outside installation
- 3 inches of 3000° refractory lining
- 100,000 BTU incinimite burner with cover
- Charge door with 2-inch 3000° refractory lining
- 2-inch refractory lining in stack and secondary chamber

Electrical & Gas Specifications

- Customer to connect power and gas to unit.
- Customer also to furnish pad for incinerator.
- **Power:** 115V
- **Natural Gas:** 5" to 8" W.C. gas pressure/ Minimum 1-1/2" gas pipe
- **LP Gas:** Low pressure. Minimum 1/2" gas pipe.

Oil Gas


US GLOBAL RECOURCES
80 YEARS OF SERVICE TO A GROWING WORLD

Warranty

All materials and workmanship used in the construction of its incinerator and the refractory are guaranteed for a one year period from the date of installation. All purchased electrical parts such as burners, fans, timers, and other controls will carry the applicable manufacturer's guarantee of 90 days. Seller shall not be liable for any injury or damages to person or property or any other incidental or consequential damages.

Specifications

- **Height:** 8'11" **Length:** 4' **Width:** 3'
- **Weight:** 3,000 lbs
- **Metal:** 11 gauge
- **Lining:** 3" 3000° refractory
- **Charge Door:** 14.5" x 24" . Lining: 2" 3,000° refractory
- **Stack:** 4' Sparkscreen: 6" Stainless Steel 2" refractory lining
- **Ash Door:** 4" x 6" **Lining:** 4" 3000° refractory
- **Grates:** 1/2" x 2" x 20"
- **Burners:** 100,000 BTU incinimite with cover. 50,000 BTU Second Chamber burner with cover.
- **Clean-out Rod:** 54" long
- **Two Timers:** 60 minute

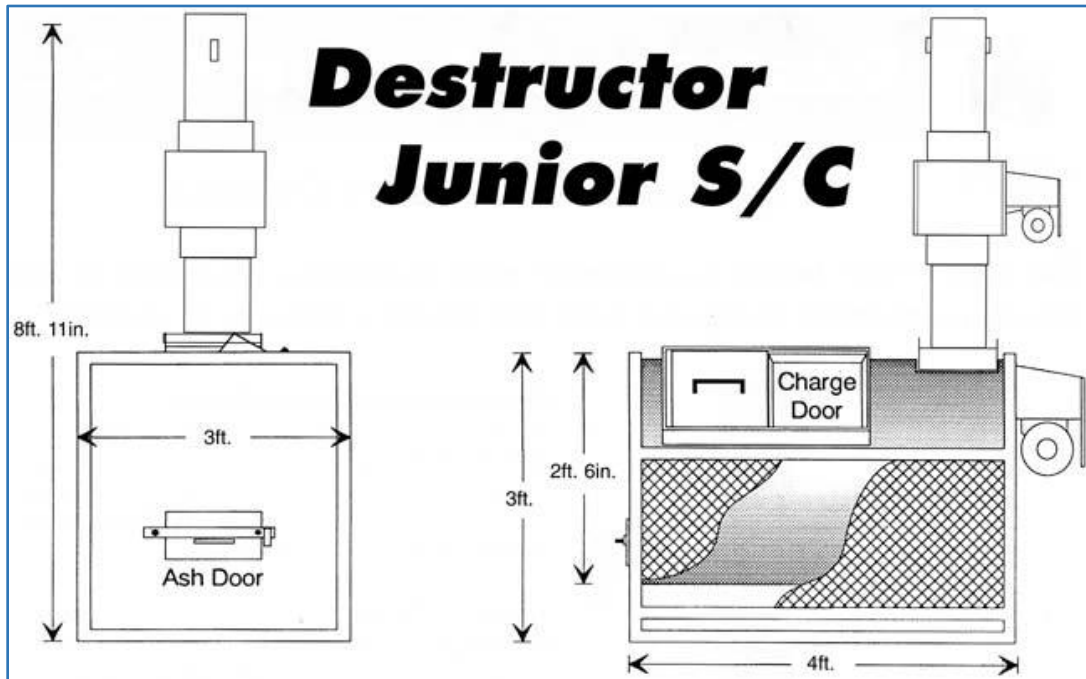

US GLOBAL RESOURCES

80 YEARS OF SERVICE TO A GROWING WORLD



U.S., CANADA & INTERNATIONAL SALES

Toll-free: +1 (888) 334-1440 | +1 (830) 755-4768 | Fax: 830-755-4753

Email: usgr@usgr.com | Website: www.usgr.com