

# The Destructor Hog Door S/C

**\$13,300**

## Incinerator with Secondary Chamber

The Destructor Incinerator with the Secondary Chamber is the large capacity/big job incinerator that sets the standard for efficiency.

### Features

- 500 Lb loading capacity
- Only requires 10' x 10' space
- Natural or Propane Fuel or Oil
- Two re-adjustable gas burners
- Thermocouple installation to conserve fuel
- 115 Volt
- Inside or outside installation
- Only 2% ash remains
- 5 inches of 3000 degree refractory lining
- 2 inch refractory lining in stack and Secondary Chamber
- 300,000 BTU incinomite burner with cover
- 50,000 BTU Secondary Chamber burner with cover
- Counter-balanced charge door with 4" 3000 degree refractory lining



### Space and Volume Efficient

Designed with limited space in mind, The Destructor S/C requires only a 10' x10' area for operation to handle up to 1000 pound capacity. It is recommended you fill incinerator half full to conserve fuel and lessen burn time. A weather-proof electrical control box means that The Destructor can be installed indoors or out.

### Energy Efficient

Two re-adjustable gas burners with a preset burn cycle time and a thermocouple installation conserves fuel and makes The Destructor S/C very energy efficient. Also, the use of fresh air to complete the destruction of refuse saves 50% or more over old-type burning methods. Natural, propane or oil fuel may be used.

### Anti-Polluting

The Destructor S/C has less smoke and odor than most incinerators and only 2% ash to remove. U.S. Environmental tests are available upon request.

**US GLOBAL RESOURCES**  
80 YEARS OF SERVICE TO A GROWING WORLD

## Warranty


All materials and workmanship used in the construction of its incinerator and the refractory are guaranteed for a one year period from the date of installation. All purchased electrical parts such as burners, fans, timers, and other controls will carry the applicable manufacturer's guarantee of 90 days. Seller shall not be liable for any injury or damages to person or property or any other incidental or consequential damages.

### Specifications

- **Height:** 9'10" **Length:** 6' **Width:** 4'
- **Weight:** 6,750 lbs
- **Metal:** 11 gauge
- **Lining:** 5-inch 3000° refractory
- **Swine Charge Door:** 17" x 36" Lining: 4" 3,000° refractory
  
- **Stack:** 4' Sparkscreen: 6" Stainless Steel 2" refractory lining
- **Ash Door:** 6" x 11" (both ends)  
**Lining:** 4" 3000° refractory
- **Grates:** 6 grates 30° long
- **Burners:** 300,000 BTU incinimite burner with cover.  
50,000 BTU Second Chamber burner with cover.
- **Clean-out Rod:** 60" long
- **Two Timers:** 6 hour

### ELECTRICAL & GAS SPECIFICATIONS

Customer to connect power and gas to unit.  
Customer also to furnish pad for incinerator.  
**Power:** 115V  
**Natural Gas:** 5" to 8" W.C. gas pressure  
**Minimum 1 1/2 " gas pipe**  
**LP Gas:** Low pressure  
**Minimum 5/8 gas pipe**

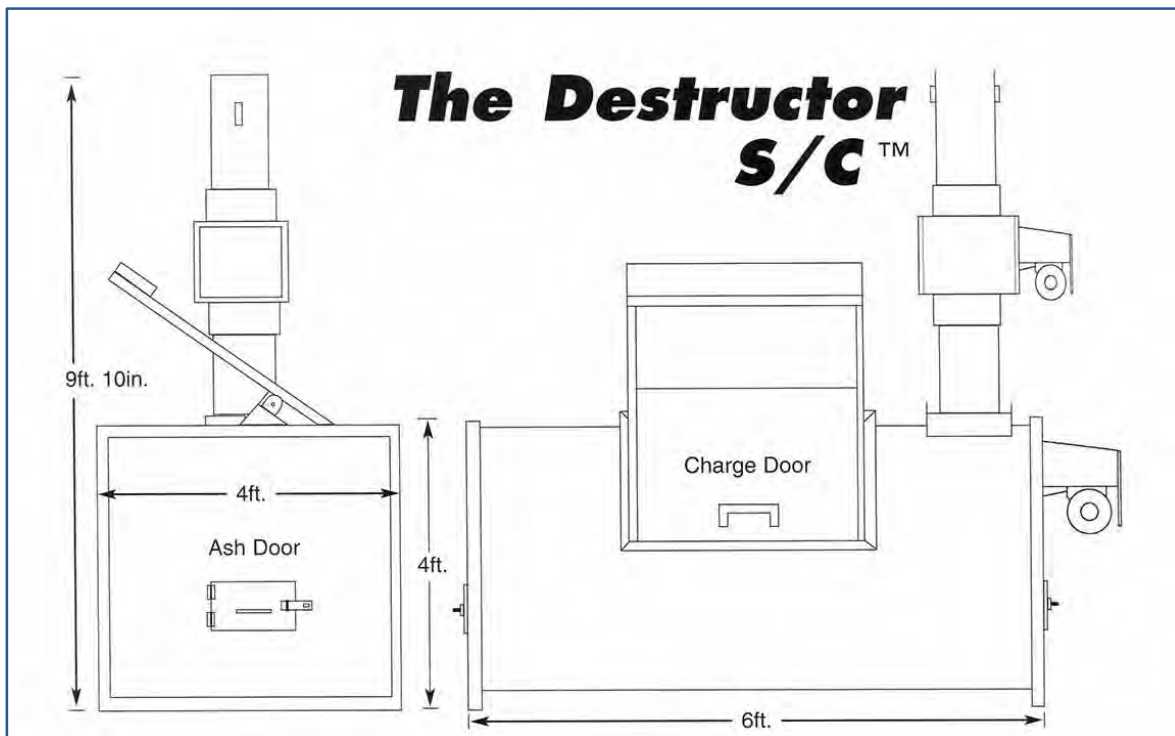

**US GLOBAL RESOURCES**  
80 YEARS OF SERVICE TO A GROWING WORLD



U.S., CANADA & INTERNATIONAL SALES  
Toll-free: +1 (888) 334-1440 | +1 (830) 755-4768 | Fax: 830-755-4753  
Email: [usgr@usgr.com](mailto:usgr@usgr.com) | Website: [www.usgr.com](http://www.usgr.com)