

The Destructor

\$9,800

Incinerator for Large Jobs

The Destructor Incinerator is the large capacity/big job incinerator that sets the standard for efficiency.

Features

- 1000 Lb chamber capacity (500 load capacity)
- Only requires 10' x 10' space
- Natural or Propane Fuel or Oil
- One re-adjustable gas burner
- Thermocouple installation to conserve fuel
- 115 Volt
- Inside or outside installation
- Only 2% ash remains
- 5 inches of 3000 degree refractory lining
- 2 inch refractory lining in stack
- Counter-balanced charge door with 4" 3000 degree refractory lining

Space and Volume Efficient

Designed with limited space in mind, The Destructor requires only a 10' x10' area for operation to handle up to 1000 pound capacity. It is recommended you fill incinerator half full to conserve fuel and lessen burn time. A weather-proof electrical control box means that The Destructor can be installed indoors or out.

Energy Efficient

One re-adjustable gas burner with a preset burn cycle time and a thermocouple installation conserves fuel and makes The Destructor very energy efficient. Also, the use of fresh air to complete the destruction of refuse saves 50% or more over old-type burning methods. Natural, propane or oil fuel may be used.

Anti-Polluting

The Destructor has less smoke and odor than most incinerators and only 2% ash to remove. U.S. Environmental tests are available upon request.

Also available in Destructor Jr (100 lbs. capacity), TC 275 (275 lbs. capacity) and HD 500 (500 lbs. capacity). Available with standard door (24 inch W) or large door (34 inch W). More counties, cities and States are now requiring secondary chamber for no odor, no smoke waste disposal. Ask your local government for rules, requirements and applicable laws.



U.S. GLOBAL RESOURCES
80 YEARS OF SERVICE TO A GROWING WORLD

Warranty


All materials and workmanship used in the construction of its incinerator and the refractory are guaranteed for a one year period from the date of installation. All purchased electrical parts such as burners, fans, timers, and other controls will carry the applicable manufacturer's guarantee of 90 days. Seller shall not be liable for any injury or damages to person or property or any other incidental or consequential damages.

Specifications

- **Height:** 8'4" **Length:** 6' **Width:** 4'
- **Weight:** 6,000 lbs
- **Metal:** 11 gauge
- **Lining:** 5-inch 3000° refractory
- **Poultry Charge Door:** 17" x 24" Lining: 4" 3,000° refractory
- **Swine Charge Door:** 17" x 36" Lining: 4" 3,000° refractory
- **Stack:** 4'4" Lining: 2-inch refractory lining
- **Ash Door:** 6" x 11" (both ends)
Lining: 2-inch 3000° refractory
- **Grates:** 30" x 8" (6 grates per unit)
- **Burners:** 300,000 BTU incinimite burner with cover.
Secondary burner available upon request.
- **Clean-out Rod:** 60" long
- **Two Timers:** 6 hour

ELECTRICAL & GAS SPECIFICATIONS

Customer to connect power and gas to unit.
Customer also to furnish pad for incinerator.
Power: 115V
Natural Gas: 5" to 8" W.C. gas pressure
Minimum 1 1/2 " gas pipe
LP Gas: Low pressure
Minimum 5/8 gas pipe

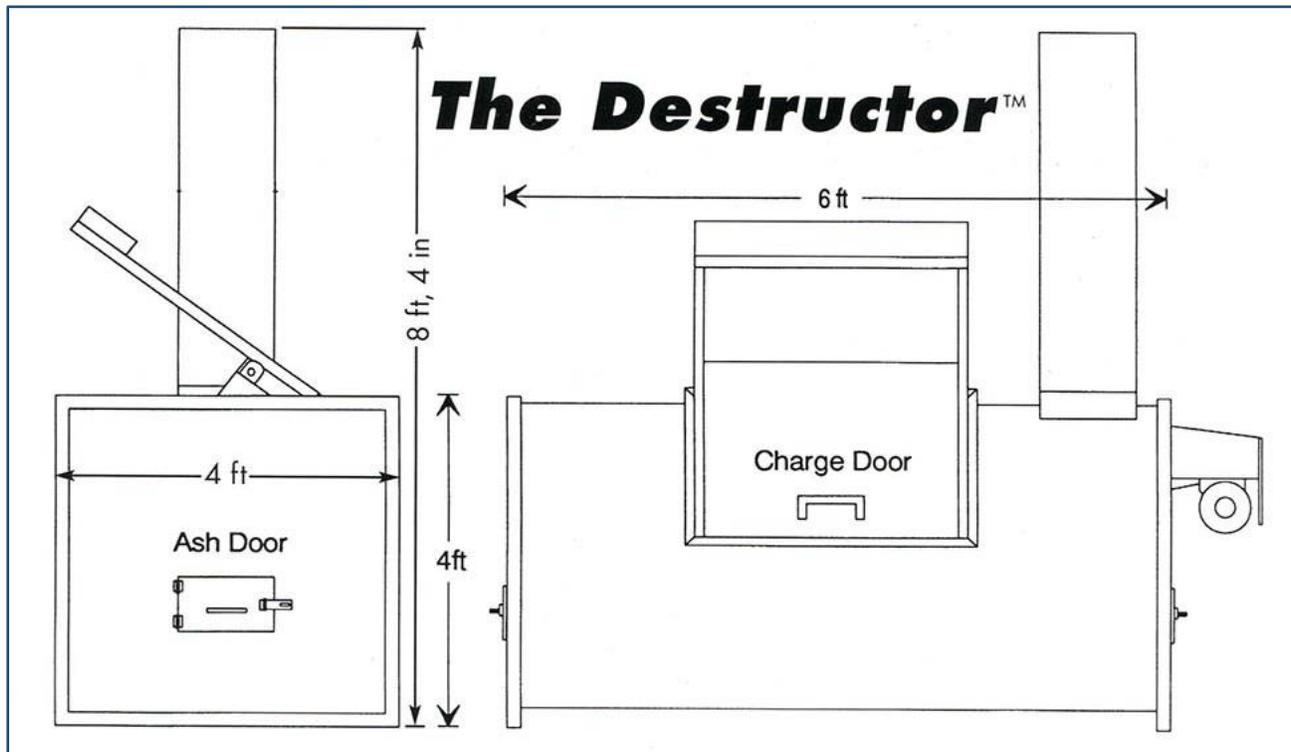

US GLOBAL RESOURCES

80 YEARS OF SERVICE TO A GROWING WORLD

U.S., CANADA & INTERNATIONAL SALES

Toll-free: +1 (888) 334-1440 | +1 (830) 755-4768 | Fax: 830-755-4753

Email: usgr@usgr.com | Website: www.usgr.com