

The HD 500 SC

\$17,700

The HD 500 Incinerator is the large capacity/big job incinerator that sets the standard for efficiency.

Features

- 1000 Lb capacity
- Only requires 10' x 10' space
- Natural or Propane Fuel
- 115 Volt
- Two re-adjustable gas burners
- Thermocouple installation to conserve fuel
- Inside or outside installation
- Only 2% ash remains
- 3 inches walls, 4 inch ends of 3000 degree refractory lining
- 2 inch refractory lining in stack
- Counter-balanced charge door with 4 inch 3000 degree refractory lining
- (HD500 secondary chamber available upon request)



Space and Volume Efficient

Designed with a limited space in mind, the HD500 requires only a 10' x 10' area for operation to handle up to 1000 pound capacity. A weather-proof control box means the HD500 can be installed indoors or out.

Energy Efficient

Two re-adjustable gas burner with a preset burn cycle time and a thermocouple installation conserves fuel and makes The HD 500 very energy-efficient. Also, the use of fresh air to complete the destruction of refuse saves 50% or more over old-type burning methods. Natural or propane fuel may be used.

Anti-Polluting

The HD 500 has less smoke and odor than most incinerators and only 2% ash to remove. U.S. Environmental tests are available upon request.

Easy Top Load Feed

HD500 Secondary Chamber available upon request.

U.S. GLOBAL RESOURCES
80 YEARS OF SERVICE TO AGROWING WORLD

Warranty


All materials and workmanship used in the construction of its incinerator and the refractory are guarantees for a one year period from the date of installation. All purchased electrical parts such as burners, fans, timers, and other controls will carry the applicable manufacturer's guarantee of 90 days. Seller shall not be liable for any injury or damages to person or property or any other incidental or consequential damages.

Specifications

- **Height:** 8'4" (11'1" w/ Secondary Chamber) **Length:** 7' **Width:** 4'
- **Weight:** 5,000 lbs (6,000 lbs with secondary chamber)
- **Metal:** 11 gauge
- **Lining:** 3" walls, 4" ends 3000° refractory
- **Swine Charge Door:** 4'4" x 20" Lining: 4" 3,000° refractory
- **Stack:** 4'4" Lining: 2-inch refractory lining
- **Ash Door:** 6" x 11" (both ends)
Lining: 2-inch 3000° refractory
- **Grates:** No grates
- **Burners:** 2 300,000 BTU incriminate with cover
50,000 BTU Second Chamber burner with cover.
- **Clean-out Rod:**
- **Two Timers:** 6 hour

Guarantee

Every unit is constructed of the highest quality materials and build by skilled technicians. Each incinerator bears the label assurance of long life and trouble-free operation.

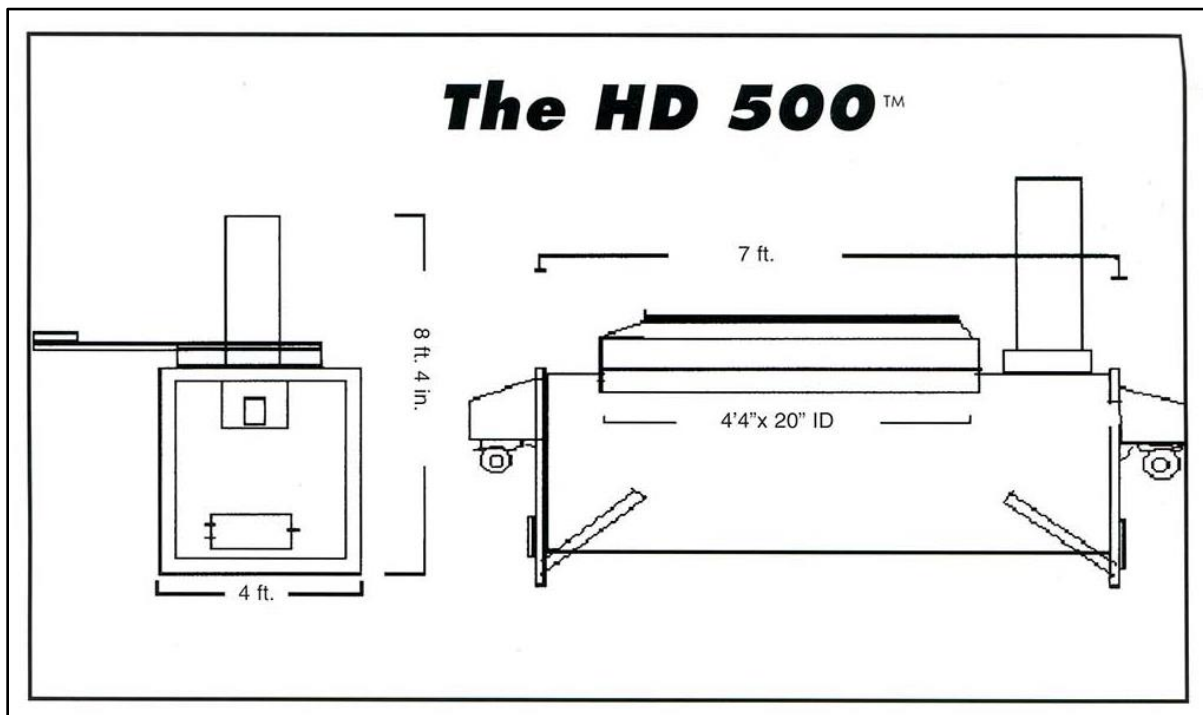

U.S GLOBAL RESOURCES
80 YEARS OF SERVICE TO A GROWING WORLD



U.S., CANADA & INTERNATIONAL SALES

Toll-free: +1 (888) 334-1440 | +1 (830) 755-4768 | Fax: 830-755-4753

Email: usgr@usgr.com | Website: www.usgr.com