

# US GLOBAL RESOURCES

SUPPLIERS OF WORLD CLASS EQUIPMENT AND SYSTEMS SINCE 1942

## QUIETCOOL PORTABLE EVAPORATIVE COOLERS



QC48

QC36

QC18




See what temperature drop you can expect in your area with the humidity chart located on back cover.



# QuietCool Brand Portable Evaporative Coolers


QuietCool evaporated air cools down hot warehouses *efficiently*.

Did you know that the majority of cases of heat stress and heat related illness occur indoors?

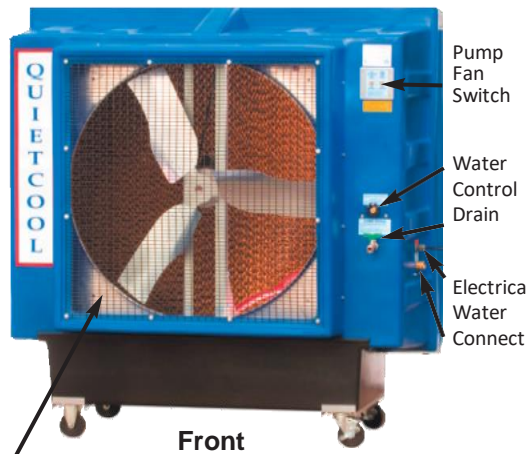

**Front**

Non-corrosive, thick gauge metal make up fan panel. Together with metal angle bars give the unit superior structural strength. Unit is secured with stainless steel nuts and bolts with nylon inserts to secure polyethylene housing to frame securely.

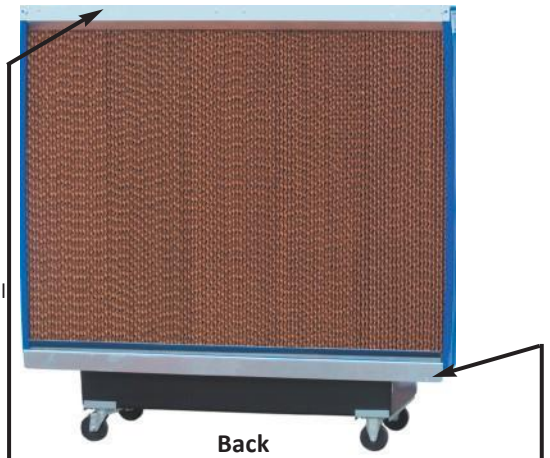

**Back**

Thick gauge aluminum angle bar at top gives structural strength to the unit and holds cooling pads in place. Thick galvanized steel gives structural strength to help hold water weight. Keeps unit from sagging, cracking or leaking.

Note: Combination of straight wheels (left) and swivel wheels (right) helps you control moving easily.

**Maintenance Free** - QuietCool Engineered and manufactured to be maintenance free.

**Easy to operate** - Needs only water and electricity.

**Energy efficient** - Efficient system, no waste.

**Easy to move** - Roll it quickly to any hot area with a combination straight wheels and swivel wheels.

**Amazingly Cooler air** - Discharged air is cooler, down to 26°F degrees cooler than the incoming air.

**Filtered Air** - Filters the air as it passes through the cooling media eliminating many air borne particles.

**Electrical** - QuietCool Portable Evaporative Cooler has ETL Approval #9800103 which conforms to UL standard 507. ETL requires rear guard. Water resistant - all electrical is sealed.

**Housing** - Constructed of rotomolded polyethylene.

**Fan** - Industrial duty aluminum construction.

**Fan Motor** - Energy efficient – built to last.

**Recirculating Water Pump** - Energy efficient, maintenance free and corrosion resistant submersible water pump.

**Water Filter** - Screens large particles from system - easy to twist and clean.


**Float Valve** - Corrosion resistant and maintenance free plastic.

**Water Lines / Fittings** - All corrosion free materials. **Cooling Pads** - Get maximum cooling from saturated pads with cross corrugated angle fluted cellulose material treated with a thermosetting resin. Specially designed for evaporative cooling so there is less load on the fan. Pads saturate with water faster, plus dry much quicker at the end of the day, *saving you time*.

## How Heat affects your company's bottom line . . .

- Work output drops
- Production drops off
- Product Quality drops
- Company profitability decreases
- Increased downtime
- Reduced profit margins
- Increased accidents
- With accidents - *increased insurance rates*

## How QuietCool works

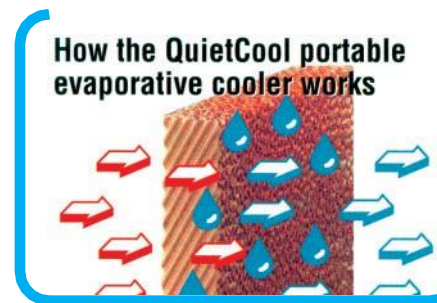

Hot air being drawn in by fan - about 26°F degrees cooler than the incoming air blowing out of mix with cooling molecules in fan - lowering the temperature down regular tap water. pads. to 26°F degrees.

QuietCool is engineered *efficient* to cool down hot work spaces and hot workers.



## QuietCool Differences and Advantages to you

With QuietCool - just hook up a garden hose - plug into your electricity and turn it on.

Thick gauge Aluminum angle bar keeps unit from sagging. PVC Pipe at top delivers water up into the metal pad channel that distributes water evenly across 6" thick evaporative pads.

Waterproof, heavy duty industrial electrical box.

Industrial duty, waterproof electrical lines.

Heavy duty water hoses. Easy access, thick gauge water filter.


Thick gauge aluminum make up fan panel. Note: Structural angle bars that provide additional strength to Motor, automatic belt tensioner, fan blade and pulley.

Note: Water float valve and water pump are securely fastened to water reservoir.

Thick gauge galvanized angle bar supports bottom - *no sagging, cracking or leaking.*

ABS plastic ensures strength to the unit and caster bars.

QuietCool combines swivel wheels (with push locks) and straight wheels so you can move it easily and park it on a dime. Then, you can lock it down in place.

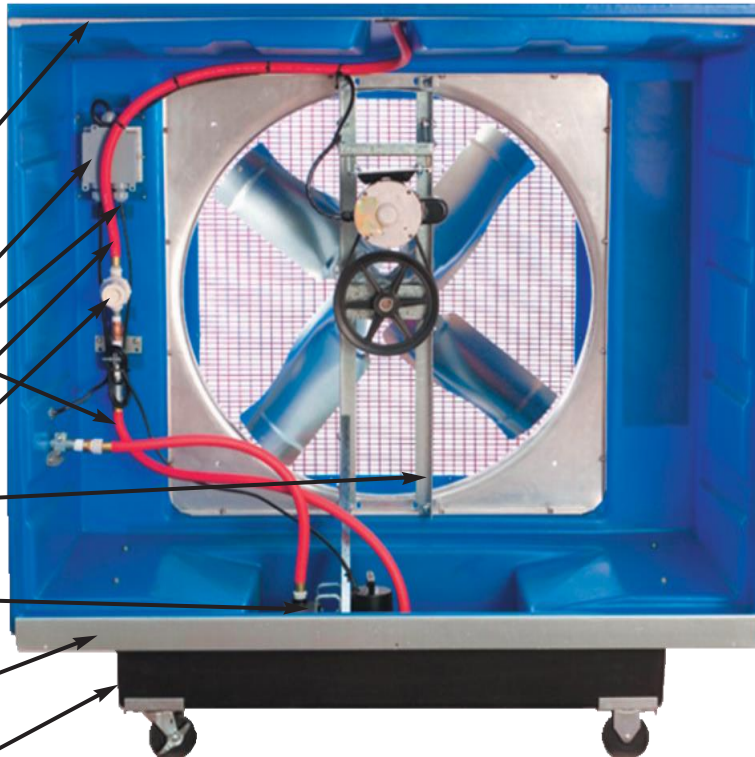

QuietCool uses a thick aluminum angle bar at the top of the unit to increase its integrity.

QuietCool builds with high Quality materials . . . to make a longer lasting unit.

### QuietCool differences & advantages to you

- QuietCool operates like a large floor-fan and costs about the same to operate but *QuietCool is cooler*. By adding water with large 6" thick saturated cooling pads - you can drop the temperature up to 26°F cooler, or more. *Cooling down your hot workers!*
- QuietCool is engineered *efficient* to operate on pennies per day using regular utility tap water and electricity.
- QuietCool uses fan motors and water pumps that were engineered to pull less Amps – *saving you daily operational cost.*
- QuietCool is *tested* 3 ways: 1. for maximum air flow at operating static pressure – you get maximum air flow in your facility because it was engineered, *then tested to ensure it.* QuietCool is tested in operating conditions with: 2. Water in the unit – and 3. Operating with electricity – before it is shipped to you.
- QuietCool uses industrial duty water hoses and connections. All electrical parts are UL rated. Units are ETL approved (*when rear guard is added*). Plus, QuietCool electrical is then *sealed from water.*
- QuietCool uses high quality materials and non-corrosive metal to build a strong frame with stainless steel nuts and bolts – the nuts have nylon inserts to hold the polyethylene housing firmly to the unit frame. *This makes a solid, long-lasting unit.*
- We add a thick gauge aluminum bar at the top of the unit to give it *added strength.*
- We add a thick gauge galvanized steel bar at the bottom of the unit to help hold 17.5 gallons of water (17.5 gallons x 8.5 lbs per gallon). You will want added strength to hold up 148 lbs. of water pulling on the bottom of the unit. This thick galvanized steel bar gives the QuietCool unit more strength – *it keeps it from sagging, cracking and ultimate leaking.*

Thick galvanized angle bar helps support water weight. Result - no sagging, cracking or leaking.





## QC36 QuietCool with 50' Directional Tube Sock

Add a tube extension adapter and a length of polyethylene tube with holes to distribute cooled air to specific locations.

**Part # QC36TE**  
**Tube Extension Adapter NSN 4130-01-507-7075**



**Part # QRT60 - 60 Gallon Reservoir Tank**

Portable water reservoir rolls easily to any location.  
**NSN-4130-01-449- 4618**

Do you have air borne materials in your work space? Like sawdust in a wood working shop - or lint in a cleaner / laundry? Get an intake pre-filter to help clean the air you breathe while protecting your cooling pads.

**Part # QC36PM for 36" unit.**  
**NSN-4130-01-507- 7074**

**Part # QC18PM for 18" unit.**  
**NSN-4130-01-507- 7049**



### 48" Unit



**QC48B2** - 48" Belt drive, 2 speed, 1HP motor, 120V, 9.8A - totally enclosed, high efficiency. Rated @ 17,600 CFM on high / 11,300 CFM on low. Sound rating: 68 DBA / high, 64 DBA / low. Water Pump - submersible, high efficiency and maintenance free.  
 1/6HP, 120V, 5A. Cools 3,600 sq. ft. Note: This unit is 7 foot tall.

**Cage Code:**  
**4JN36**

### 18" Unit



**QC18DVS** - 18" Direct drive, variable speed, 1/4HP motor, 120V, 3.3A - totally enclosed, high efficiency. Rated @ 3,000 CFM. Sound rating: 74 DBA. Water Pump - submersible, high efficiency and maintenance free. 1/5HP, 120V, 1.1A. Cools 900 sq. ft. New larger water reservoir for hose free operation.

**NSN-4120-01- 507-7036**

### 36" Units



**QC36B1** - 36" Belt drive, 1 speed, 1/2HP motor, 120V, 7.4A - totally enclosed, high efficiency. Rated @ 9,700 CFM. Sound rating: 66 DBA. Water Pump - submersible, high efficiency and maintenance free.

1/6HP, 120V, 5A. Cools 2,500 sq. ft. Plus, you can add a rear guard QC36RG to make this unit.

ETL Approved.

**NSN-4120-01-449-7532**



**QC36D1X** - 36" Direct drive, 1 speed, 3/4HP motor, 120V, 6.76A - totally enclosed, high efficiency. Rated @ 9,700 CFM. Sound rating: 74 DBA.

Water Pump - submersible, high efficiency and maintenance free.

1/6HP, 120V, 5A. Cools 2,500 sq. ft.

**NSN-4120-01-449-7531**

## 36" Units



**QC36B3** - 36" Belt drive, 3 speed, 3/4HP motor, 120V, 8.9/6.3/3.2 Amps - totally enclosed, high efficiency and maintenance free. Rated @ 9,700 CFM high, 6,410 CFM medium & 4,850 CFM low. Sound rating: 66 DBA high, 62 DBA medium & 55 DBA low. Water Pump - submersible, high efficiency and maintenance free. 1/6HP, 120V, 5A. Cools 2,500 sq. ft. NSN-4120-01- 449-7535



**QC36B1XHL EXPLOSION PROOF** - 36" Belt drive, 1 speed, 3/4HP motor, 120V, 10.3A - totally enclosed, high efficiency and maintenance free. Rated @ 10,900 CFM @.15. Sound rating: 69 DBA. Class I, Group D. Class II, Groups F & G. Water Pump - submersible, high efficiency & maintenance free. 1/2HP, 120V, 7.8A. Cools 2,500 sq. ft. NSN-4120-01- 449-7776



Cool off your outdoor cookouts. Keep your family and friends more comfortable outside.



**QC18HB - Hanging Bracket**  
Allows you to hang your QuietCool up higher, off the deck.



**QC36HB - Hanging Bracket**  
Allows you to hang your QuietCool up higher, off the deck.  
NSN-4130-1507- 7065



**QC36DVS** - 36" Direct drive, variable speed, 5/8HP motor, 120V, 6.6A - totally enclosed, high efficiency and maintenance free. Rated @ 12,300 CFM. Sound rating: 73 DBA high & 53 DBA low. Water Pump - submersible, high efficiency and maintenance free. 1/6HP, 120V, 5A. Cools 2,500 sq. ft. NSN-4120-01-449-7531



**QC36B1X** - 36" Belt drive, 1 speed, 3/4HP motor, 120V, 8.4A - totally enclosed, high efficiency and maintenance free. Rated @ 12,980 CFM. Sound rating: 73 DBA. Water Pump - submersible, high efficiency and maintenance free. 1/6HP, 120V, 5A. Cools 2,500 sq. ft. NSN4120-01-505-2011



Large shipping areas need some serious cooling for workers.



## Executive Report & Financial Decisions (ROI)

Keep your pool and patio cooler for all your family and guests.

“All I know is . . . it’s the first thing my workers turn on in the morning!”

QuietCool blows cooler air . . . no drops, water, or misting.



### Executive Report

#### Explanation

Ever witness a natural rainstorm approaching where the temperature dropped noticeably cooler? That cooling effect was evaporated water in the air. QuietCool generates evaporated air to cool down your employees.

#### Overview

The QuietCool is like a large floor fan – only better. It blows *cooler* air – because the large fan blade pulls in large volumes of air through 6” water saturated cooling pads – the outside heat is released and the temperature drops.

Once your employees understand the cooling benefits – they will want to learn-how-to operate and take care of the QuietCool because it provides them cooling.

**Operational costs** Electrical and Water.

**Electrical cost** for operating a QuietCool is about the same as a large floor fan. This unit was engineered efficient to pull less Amps. QuietCool requires a standard 120 Volt on a regular 20 Amp breaker.

**Water requirements** regular utility water – less than 60 pounds per square inch (psi).

**On** - the employee in-charge of the unit will walk in – turn-on the water pump – make sure the water is running – adjust the water flow then, switch on the fan.

**Off** - At the end of the workday – 15 minutes before quitting time – your employee in-charge will turn-off the water pump and let the fan continue to run – to dry the cooling pads (to avoid any algae). When the cooling pads are completely dry – turn off the fan.

### NASA on Heat Stress NASA Report CR-1205-1

Effective Temperature	75	80	85	90	95	100	105
Loss in Work Output	3%	8%	18%	29%	45%	62%	79%
Loss in Accuracy	-	5%	40%	300%	700%	-	-

### Financial Decisions (ROI)

Purchasing mistakes can be costly and time consuming. At QuietCool we understand what is important. This is an engineered efficient portable evaporative cooler. The QuietCool is durable (will last you many years) – it is energy efficient (minimal daily operational costs) – it’s easy to incorporate into your daily operational process – the training curve is minimal – maintenance is minimal – you might even experience an increase in productivity. QuietCool is engineered to the nth degree.

#### QuietCool was engineered efficient

- **Durable** - engineered to last for years.
- **Energy efficient** - motor & water pump pull less Amps - minimal daily operational cost.
- **Electrical** - uses regular 120 Volt, 20 Amp line. It has a high efficiency motor.
- **Water** - uses regular utility water. It has a high efficiency pump that delivers water to saturate the cooling pads.
- **Easy to use** - roll the unit to different areas easily with a combination of straight and swivel casters – keeps unit in a straight line.
- **Training curve** - your employees will want to know how to operate the QuietCool. It keeps them cooler.
- **Easy to incorporate** - into your operations.
- **Minimal maintenance** - it was engineered to be maintenance free.

With QuietCool you can *feel* the difference. Your employees look energized, more attentive, more responsive and alert. You can *hear* them – *emotionally* happier and more upbeat – their numbers are up. Performance has improved – they are getting more done. Why? Your employees are *cooler*.

#### QuietCool Mission Statement

“Product *Quality* is the primary motivation for product change at QuietCool. We change our products to make a better product, *not to make it cheaper.*”

## Accessories & Products



**QC1200** - 2 Speed direct drive, 120V, 60Hz, .7A, high efficiency motor. Rated at 1,300 CFM. 4.8 gallon water reservoir, cools 500 sq. ft.




**Part # QC36CC**  
**Protective Storage Covers**  
For all QC36" QuietCool Units

**NSN-4130-01-507-7079**

**Part # QC18CC**  
**Protective Storage Covers**  
For all QC18" QuietCool Units



QuietCool cools welders and helps to remove caustic gases so they can see their work.



**Part # CD 48612**  
Set of 5 Replacement cooling pads for all 36" coolers.

**NSN-4130-01-507-**

**7064 Part # CD 30612**

Set of 2 Replacement pads for all 18" coolers.

**NSN-4130-01-507-7042**



**Part # QC36AL**  
Directional discharge louvers for a 36" QuietCool.

**NSN 4130-01-507-7070**

**Part # QC10X3RC/QC10X3SC**  
10" Rough Terrain W/heels.  
**NSN-4130-01-507-7061**

Designed for U.S. Military  
Now available to the general public.



**HAF 18" Horizontal Air Flow Fan** - 18" fan blade, 1 speed direct drive, 1/10hp motor, 120 volt .9Amps, high efficiency. Rated @ 2,000 cfm. Dimensions: 18" diameter, 20" x 8", 16 Lbs. Comes with 3 types of hangers.



**FC 3076 Direct Drive Air Circulator Fan** - 30" diameter fan blade, 2 speed, 1/3 hp, 115 volts, 60 Hz, 4.2 amp motor, 7.5 foot cord. Rated at 5500 cfm high and 3850 cfm low. Ideal for moving large volumes of air in industrial plants, warehouses, garages, gymnasiums, and recreational halls.





**Evap-O-Matic Chemical Water Treatment Tablets**

for all QuietCool's - Treatment: 1 tablet for 36" coolers.

- Adds life to cooler equipment
- Increase cooling efficiency
- End swampy odors
- Stop scale deposits

EPA registered protection from harmful air-borne organisms found in evaporative coolers.

**QCTAB2 NSN-4130-01-507-7081**  
2-pack

**QCTAB12 NSN-4130-01-507-7082**  
Jar of 12 tablets



**Model QCG 1001 Water Stabilizer**

Environmentally friendly Chemical Free Water Treatment. Removes existing scale, corrosion and algae. The Water Stabilizer suspends particles in the water and flushes out - when you flush out the sump. This unit will extend the life of your unit, the plumbing and cooling pads.

**Model QCG1001** for 36" Models  
NSN 4130-01-507-7078

**Model QCG900** for 18" Models  
NSN 4130-01-507-7055



**Model QC18AL**  
Directional louvers for a 18" QuietCool. All louvers can be turned 90 degrees for side to side operation.  
NSN 4130-01-507-7044

**Model QC36AL**  
Directional louvers for a 36" QuietCool.  
NSN 4130-01-507-7070

**How to order**

**Which QuietCool is right for you?**

How many square feet do you need to cool?

Do you need a 1 speed, 3 speed or variable speed QuietCool?

Look over the units - decide which QuietCool is best for you.

Finally call us with your zip code for shipping.

**QuietCool can cool down your workers in work areas where the cost of AC is simply out of the question . . .**

- Factory or Industrial Shops
- Automotive repair shops
- Confined workspaces
- Cleaners & laundries
- Woodworking shops
- Assembly lines
- Loading docks
- Trucking bays
- Storage areas
- Warehouses

**US GLOBAL RESOURCES**

Web Site: [www.usgr.com](http://www.usgr.com)  
E-mail: [usgr@usgr.com](mailto:usgr@usgr.com)  
Toll-free: 1-888-334-1440  
Ph: 1-830-755-4768

US GLOBAL RESOURCES has been in business for over 80 years supplying a wide variety of products for horticultural and agricultural industry. We offer fans and evaporative cooling pads and system for greenhouse, nursery, garden centers, industrial, institutions, warehouse and more. Call us at 1-888-334-1440 or email [usgr@usgr.com](mailto:usgr@usgr.com) to find out more.

**Relative Humidity Chart**

**Relative Humidity Chart - to determine the type of cooling you might expect in your area.**

Dry Bulb Degree	Wet Bulb Degree	Temperature Difference (Dry - Wet)	Temperature Drop thru QuietCool	QuietCool Output Temperature
-----------------	-----------------	------------------------------------	---------------------------------	------------------------------

**20% Relative Humidity**

80	55.30	24.70	18.70	62.20
85	59.50	25.50	19.10	66.60
90	63.50	26.50	19.90	70.90
95	66.00	29.00	21.80	74.10
100	69.40	30.60	22.95	77.90
110	75.50	34.50	26.90	85.10

**30% Relative Humidity**

80	60.00	20.00	14.40	65.60
85	63.60	21.40	15.50	69.50
90	67.20	22.80	16.50	73.50
95	70.00	25.00	18.00	77.00
100	74.50	25.50	18.40	81.60
110	80.50	29.50	21.40	83.70

**40% Relative Humidity**

80	63.50	16.50	11.90	68.10
85	67.40	17.60	12.70	72.00
90	71.00	19.00	13.70	76.30
95	75.20	19.80	14.20	80.80
100	79.10	20.90	15.10	84.90
110	88.00	22.00	15.80	94.20

**50% Relative Humidity**

80	66.60	13.40	9.70	70.40
85	70.80	14.20	10.20	74.80
90	74.90	15.10	10.90	79.10
95	83.50	15.80	11.40	83.60
100	83.50	16.50	11.90	88.10

**60% Relative Humidity**

80	69.50	10.50	7.60	72.50
85	74.00	11.00	7.80	77.10
90	78.20	11.80	8.50	81.50
95	82.70	12.30	8.90	86.20
100	88.00	12.00	8.70	91.40

**70% Relative Humidity**

80	72.30	7.70	5.60	77.50
85	77.00	8.00	5.80	79.30
90	81.50	8.50	6.30	83.90
95	87.00	8.00	5.80	89.30
100	91.00	9.00	6.50	93.60

The dry bulb temperature of the air is the temperature that we usually think of as air temperature. It is the temperature measured by a regular thermometer exposed to moving air.

Wet Bulb temperature is the lowest temperature that can be reached by the evaporation of water. Wet bulb temperature is the temperature you feel when your skin is wet and exposed to moving air.